


- Thermally Stabilized
- Ext Ref Input (PLL)
- Status Display
- Lock Detect



Sapphire Loaded Cavity Oscillators X-Band

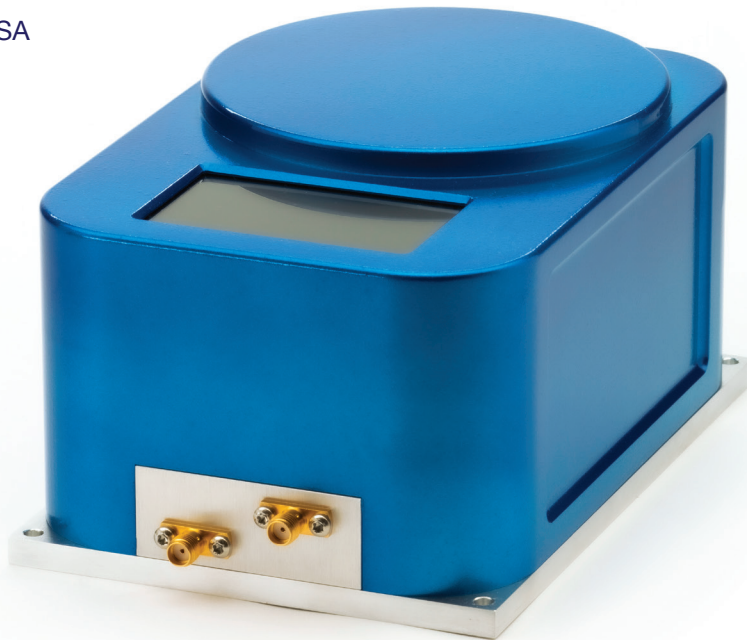